


TO-56 & GUTS Package

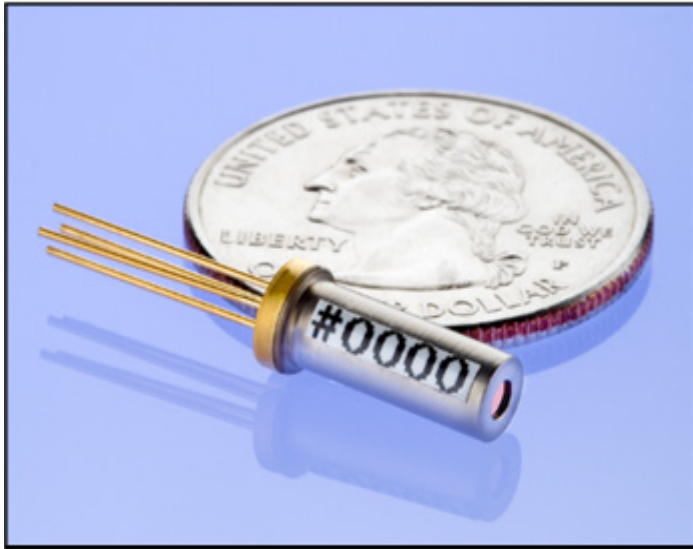

Innovative Photonic Solutions' proprietary single-mode wavelength stabilized laser features high output power with ultra-narrow spectral bandwidth and a diffraction limited output beam. Designed to replace expensive DFB, DBR, fiber, and external cavity lasers, the Single-Mode Spectrum Stabilized Laser offers superior wavelength stability over time, temperature, and vibration; and is manufactured to meet the most demanding wavelength requirements.

Standard Wavelengths

633 nm	685nm	785nm	852nm
638nm	780nm	808nm	976nm
660nm	783nm	830nm	1053nm
			1064nm

Custom wavelengths available upon request

Applications

This laser package is designed for OEM Integration and is ideal for:

- High-resolution Raman Spectroscopy
 - Handheld Raman Spectroscopy
 - Confocal Microscopy
 - Raman Imaging
 - Portable Raman
 - Process Raman
- Metrology/Interferometry
- Remote Sensing
- Laser speckle contrast imaging
- Laser illumination

Key Features

The TO-56 packaged product line comes standard with a circularized and collimated output beam, internal thermistor and ESD protection. Lasing wavelength can be accurately specified and repeatedly manufactured to within ± 0.1 nm upon request.


- High-Power Single-Spatial-Mode, Single-Frequency Output
- Ultra-Narrow Spectral Linewidth (~ 100 kHz)
- Stabilized Output Spectrum (< 0.007 nm/ $^{\circ}$ C)
- Gaussian TEM₀₀ Spatial Mode
- Circularized and Collimated Output Beam
- Integral ESD Protection & Thermistor
- Integral Laser Line Filter
- SMSR 70 dB w/ laser line filter (40 dB without)

Specifications

Wavelength Tolerance	+/- 0.5 nm
Spectral Linewidth (DI)	~100kHz Instantaneous
Wavelength Stability Range	15 C - 45 °C
SMSR	35 - 45 dB
SMSR w/integral laser line filter	70dB
Power Stability	1% typical
Beam Exit Angle	< 3 degrees
Beam Quality ($M^2/1/e^2$)	< 1.2
Beam Ellipticity	< 1:5:1
PER	>17 db
Polarization Orientation	Parallel to V-notches
Beam Divergence (Typical)	~ 2 mrad
	~ 4 mrad for 785nm
Spatial Profile	TEM00

λ (nm)	Output Power (mW)	Base Part Number	Max Current, Voltage
633	50	I0633S50050B	175 mA, 3.0V
638	60	I0638S50060B	250mA, 3.2V
660	60	I0660S50060B	175mA, 3.3V
685	40	I0685S50040B	60 mA, 3.0V
780	100	I0780S50100B	220mA, 3.3V
783	100	I0783S50100B	200mA, 2.2V
785	100	I0785S50100B	200mA, 2.2V
	150	I0785S50150B	400mA, 3.0V
808	175	I0808S50175B	400mA, 3.0V
830	175	I0830S50175B	500mA, 2.2V
852	175	I0852S50175B	500mA, 2.2V
976	175	I0976S50175B	500mA, 2.2V
1053	175	I1053S50175B	500mA, 2.2V

Part Schema

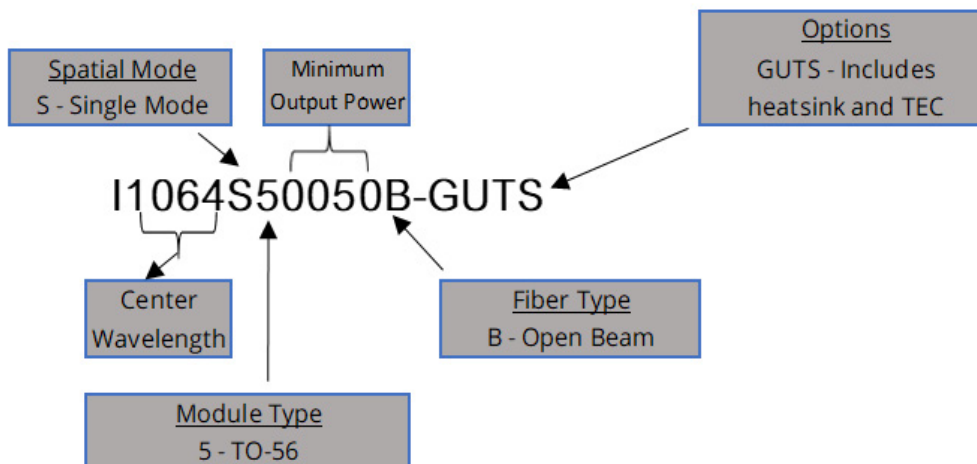


GUTS Package

A Convenient Method For Heat Sinking Your Laser


Features:

- Integrates TEC, heatsink and TO-56 laser into one component.
- Offers 2-axis alignment in both pitch and yaw.

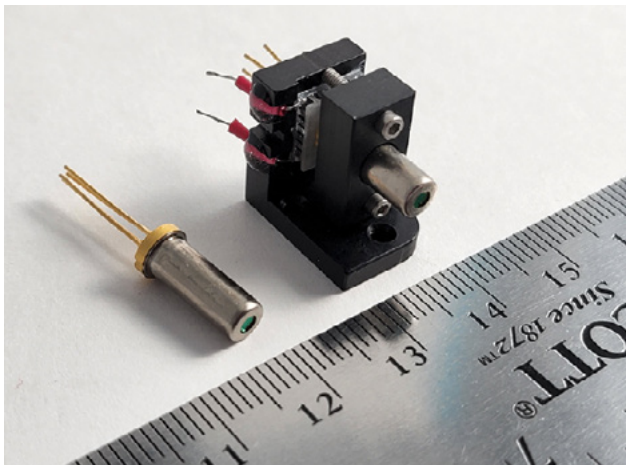

Electrical Specs

Pin 1	LD Anode (+), Case Ground
Pin 2	LD Cathode (-)
Pin 3	Thermistor - 10kOhm @ 25° C
Pin 4	Thermistor - 10kOhm @ 25°C

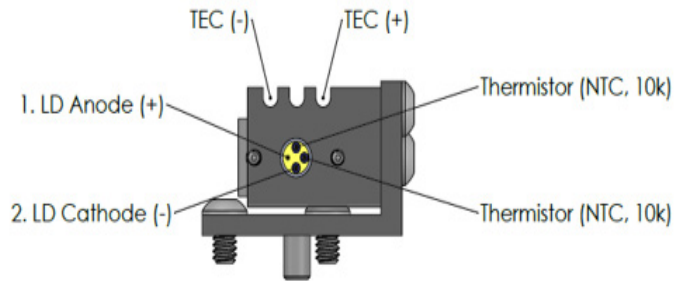


BACK VIEW


GUTS TEC Current Limit	1.3A
GUTS TEC Voltage Limit	3.0V
Integral Thermistor	Betatherm 10K3CG3

Recommended Electrical Connector (Not Included)	
Description	Thorlabs Part Number
Ø9 mm 4-Pin Laser Diode Socket	S8060-4

Selected Data

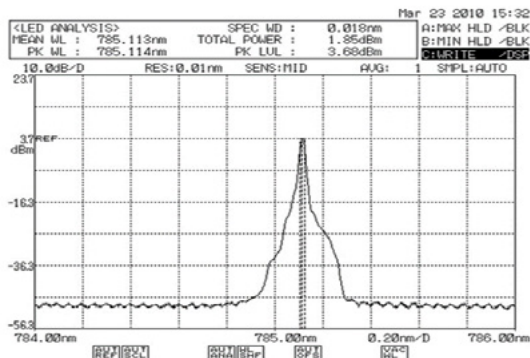


Typical 785nm SS Laser Spectrum

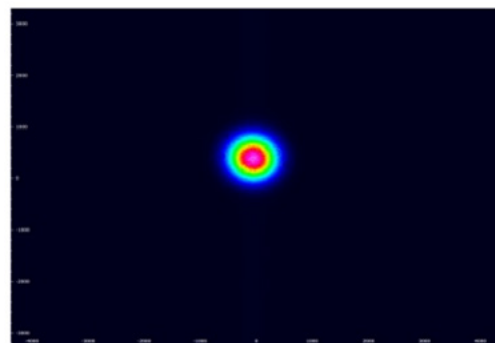

Typical 785nm Beam Quality

Mechanical Drawings

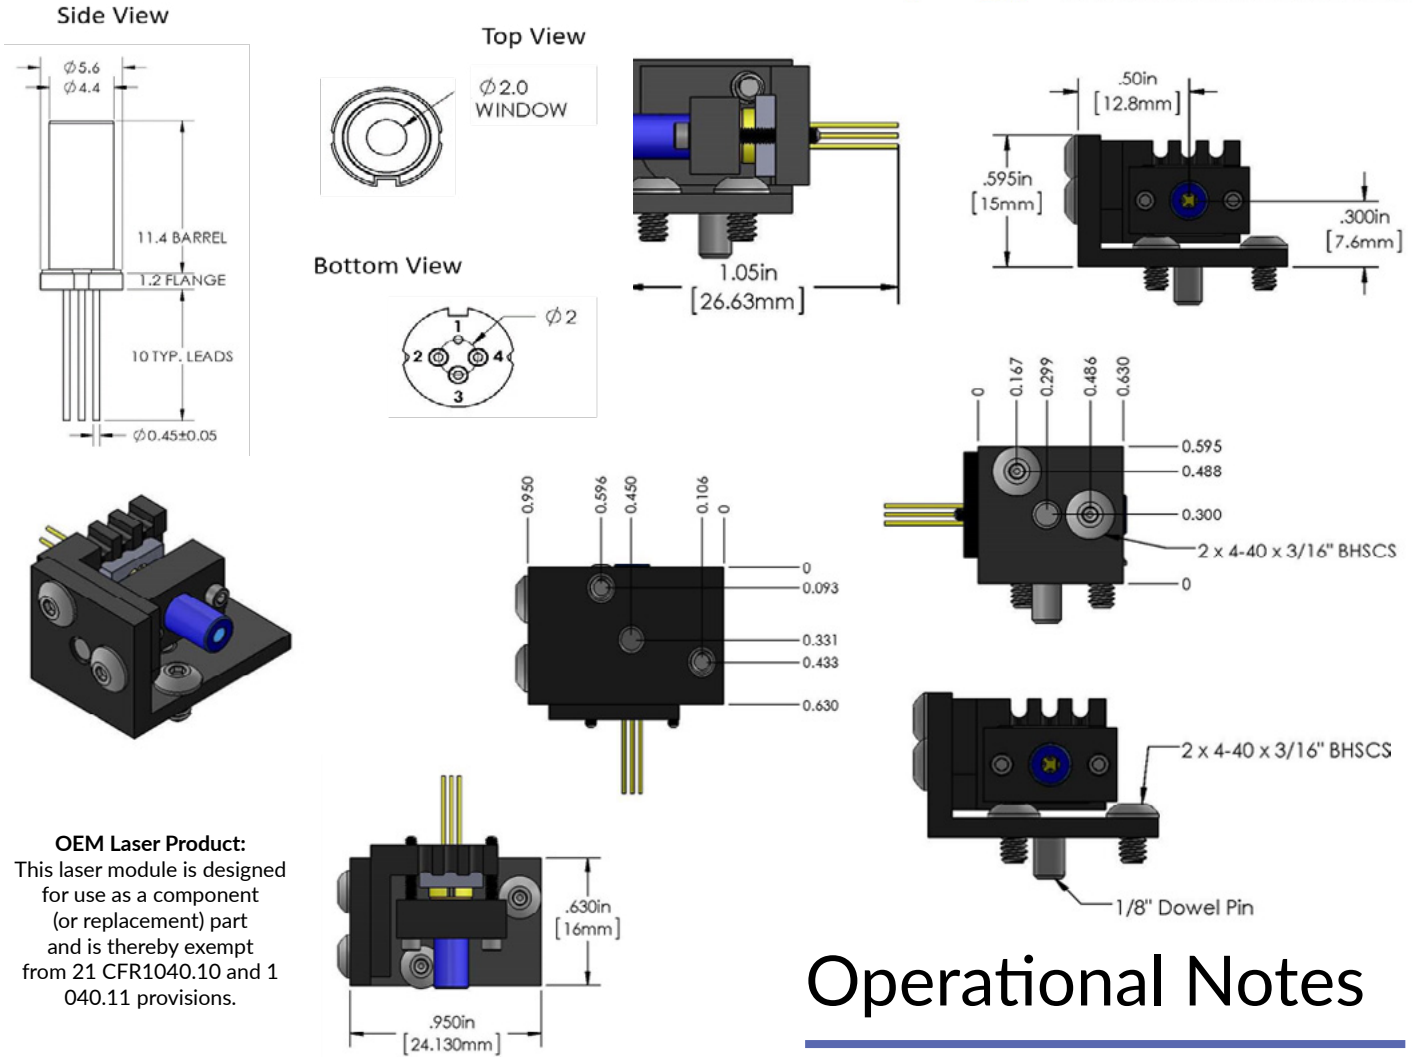

OEM Laser Product:
 This laser module is designed for use as a component (or replacement) part and is thereby exempt from 21 CFR1040.10 and 1040.11 provisions.

Operational Notes

1. Laser must be compression mounted on a Thermo-Electric Cooler (TEC) and heat sink to guarantee wavelength stable performance
2. Laser will operate in single frequency mode at set-points between 10 and 45 degrees, however, optimal operating set point must be determined for each laser diode to avoid mode-hopping (see note 4)
3. Do not retro-reflect beam! This can cause Catastrophic Optical Damage (COD) and is not covered under warranty
4. To determine optimal operating point, plot wavelength vs temperature to determine where mode-hop locations are. Set operating temperature halfway between mode-hops. This will ensure the most stable operation (IPS can offer the option of determining this optimal operating point for each diode)

Innovative Photonic Solutions, Inc.
 313 Enterprise Drive
 Plainsboro, NJ 08536

Phone: (732) 230-1601

sales@ipslasers.com
 www.ipslasers.com

